

DEER STANDARD DOUBLE CABIN PICKUPS TECH SPECIFICATION

Left driving, Rear drive



Specification:

Dimensions (L x W x H) (mm):	4890x1740x1670/4870x1750x1800
Cargo-body Inner Dimensions (L x W x H) (mm):	1405x1465x405
Payload (kg):	500
Total Mass (kg):	2215/2400
Complete Vehicle Kerb Mass (kg):	1390/1575
Max Speed (km/h) :	>=120
Type of driving:	2WD/4WD
Track base (front/rear) (mm):	1450/1430/1490/1470
Wheel base (mm):	2850
Front suspension:	Double cross-arms type, independent suspension with torsion bar springs
Rear suspension:	Variable-rate, unsymmetrical leaf spring suspension
Front Suspension/Rear Suspension (mm):	850/1220/750/1220
Brake mode:	Two-circuit hydro-vacuum brake
Brake (front/rear):	Disc brake/drum brake
Gear:	5 forward gear, 1 reverse gear
Tire :	205/70R14 /215/75R15
Passengers (front/rear):	2/3
Engine:	491QE

DEER MEDIUM DOUBLE CABIN PICKUPS TECH SPECIFICATION Left driving, Rear drive



Specification:

Dimensions (L x W x H) (mm):	5130x1740x1670/5105x1750x1800
Cargo-body Inner Dimensions (L x W x H) (mm):	1600x1460x405
Payload (kg):	500
Total Mass (kg):	2225/2470
Complete Vehicle Kerb Mass (kg):	1400/1645
Max Speed (km/h) :	>=120
Type of driving:	2WD/4WD
Track base (front/rear) (mm):	1450/1430/1490/1470
Wheel base (mm):	3085
Front suspension:	Double cross-arms type, independent suspension with torsion bar springs
Rear suspension:	Variable-rate, unsymmetrical leaf spring suspension
Front Suspension/Rear Suspension (mm):	850/1220/750/1220
Brake mode:	Two-circuit hydro-vacuum brake
Brake (front/rear):	Disc brake/drum brake
Gear:	5 forward gear, 1 reverse gear
Tire :	205/70R14 /215/75R15
Passengers (front/rear):	2/3
Engine:	491QE


DEER REGULAR CABIN PICKUPS TECH SPECIFICATION Left driving, Rear drive (4X2)



Specification:

Dimensions (L x W x H) (mm):	4945x1740x1670
Cargo-body Inner Dimensions (L x W x H) (mm):	2260x1465x405
Payload (kg):	500
Total Mass (kg):	1945
Complete Vehicle Kerb Mass (kg):	1315
Max Speed (km/h) :	>=120
Type of driving:	2WD
Track base (front/rear) (mm):	1450/1430
Wheel base (mm):	2960
Front suspension:	Double cross-arms type, independent suspension with torsion bar springs
Rear suspension:	Variable-rate, unsymmetrical leaf spring suspension
Front Suspension/Rear Suspension (mm):	870/1160
Brake mode:	Two-circuit hydro-vacuum brake
Brake (front/rear):	Disc brake/drum brake
Gear:	5 forward gear, 1 reverse gear
Tire :	205/70R14 or 215/75R15
Passengers (front/rear):	2/3
Engine:	491QE

DEER SENIOR DOUBLE CAB PICKUP TECH SPECIFICATION Left driving, Rear drive

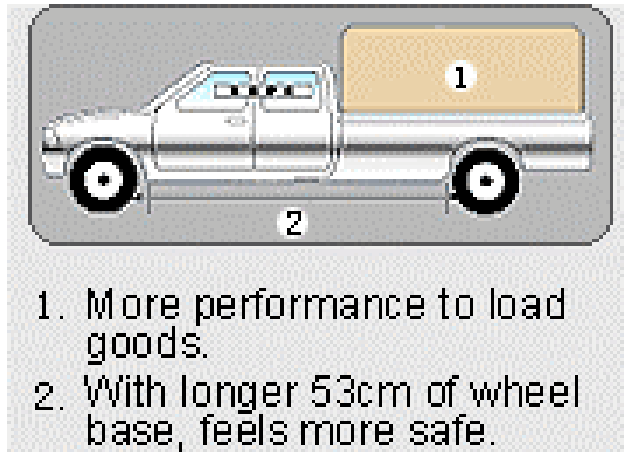

Specification:

Dimensions (L x W x H) (mm):	5305x1740x1670/5280x1750x1800
Cargo-body Inner Dimensions (L x W x H) (mm):	1865x1465x405
Payload (kg):	500
Total Mass (kg):	2245/2430
Complete Vehicle Kerb Mass (kg):	1420/ 1620
Max Speed (km/h) :	>=120
Type of driving:	2WD /4WD
Track base (front/rear) (mm):	1450/1430 / 1490/1470
Wheel base (mm):	3380
Front suspension:	Double cross-arms type, independent suspension with torsion bar springs
Rear suspension:	Variable-rate, unsymmetrical leaf spring suspension
Front Suspension/Rear Suspension (mm):	850/1100 / 870/1100
Brake mode:	Two-circuit hydro-vacuum brake
Brake (front/rear):	Disc brake/drum brake
Gear:	5 forward gear, 1 reverse gear
Tire :	205/70R14 or 215/75R15
Passengers (front/rear):	2/3
Engine:	491QE

DEER EXTRA CABIN PICKUP TECH SPECIFICATION Left driving , Rear drive (4X2)



1. Enough space for people to sit.
2. More reasonable center of gravity.
3. More Stable owing to the long wheel base.

Specification:

Dimensions (L x W x H) (mm):	5130x1740x1670
Cargo-body Inner Dimensions (L x W x H) (mm):	1865x1465x405
Payload (kg):	500
Total Mass (kg):	2100
Complete Vehicle Kerb Mass (kg):	1340
Max Speed (km/h) :	>=120
Type of driving:	2WD
Track base (front/rear) (mm):	1450/1430
Wheel base (mm):	3085
Front suspension:	Double cross-arms type, independent suspension with torsion bar springs
Rear suspension:	Variable-rate, unsymmetrical leaf spring suspension
Front Suspension/Rear Suspension (mm):	870/1220
Brake mode:	Two-circuit hydro-vacuum brake
Brake (front/rear):	Disc brake/drum brake
Gear:	5 forward gear, 1 reverse gear
Tire :	205/70R14 or 215/75R15
Passengers (front/rear):	2/3
Engine:	491QE